



ABRASION/MECHANICAL

FastWrap™ 2305

Product Highlights

- Operating temperature up to +150°C (+302°F)
- Excellent abrasion resistance
- Flexible and conformable
- Very easy installation
- Integrated closure
- No need for additional taping


Typical Applications

- Wire harnesses
- Vent hose
- TOC hose
- Brake and shift cables



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

FASTWRAP_07202017

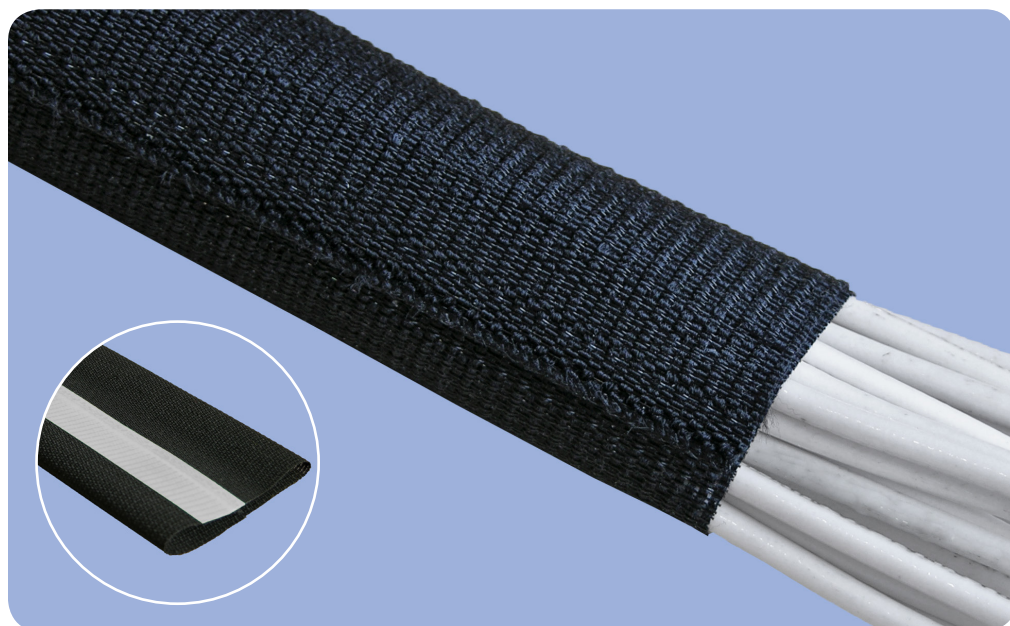

FastWrap™ 2305 is an open sleeve designed to offer a high level of component protection. Constructed with a combination of monofilament and multifilament yarns, FastWrap 2305 also incorporates an adhesive tape system to enable secure closure of the sleeve.

The adhesive closure system is divided in two parts to ensure both localization and closure. One adhesive strip helps hold the sleeve in place while the second strip creates the secure closure. Installation is very easy and eliminates the need of additional taping.

FastWrap 2305 is flexible, conformable, and adaptable to many diameters. The integral closure system enables the product to remain closed even when flexed or curved during routing. Easy to install, even on large lengths, FastWrap 2305 can reduce installation costs and the product is delivered in the flat form to provide the additional benefit of reduced transportation costs.

BentleyHarris®
Protection Products

Performance Data – FastWrap™ 2305

Property	Test Method	Result
Temperature Rating	240 hours at +175°C (+150°C rating)	Pass +150°C (+302°F)
Low Temperature Flexibility	BH100-016A	Pass -40°C (-40°F)
Flammability	FMVSS 302	Pass
Melt Temperature	ASTM D3418	245°C to 265°C (+473°F to +509°F)

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Warp Yarn: Polyester (PET) monofilament
Fill Yarn: Polyester (PET) multifilament

Availability

FastWrap 2305 is available in sizes 20mm, 30mm and 40mm and cut to your specification. Standard color is black. Please contact your sales representative for availability.

Standard Sizes

Size	Recommended Application Range	
	Min Ø mm	Max Ø mm
20	8	20
30	21	30
40	31	40

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.



USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp