



ABRASION/MECHANICAL

FlexWrap® 2300

Product Highlights

- Operating temperature up to +125°C (+257°F)
- Wrappable design for easy installation and removal
- Closure maintains low profile for flat cables and harnesses
- Lightweight and low bulk
- Easily accommodates breakouts
- Excellent flexibility


Typical Applications

- Wire harness bundling
- Areas restricted by breakouts
- Instrument panel harnesses
- Body wiring harnesses
- Dome light wiring harnesses
- Door lock rods
- Tubing, hose, and cable assemblies



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

FW2300_07202017

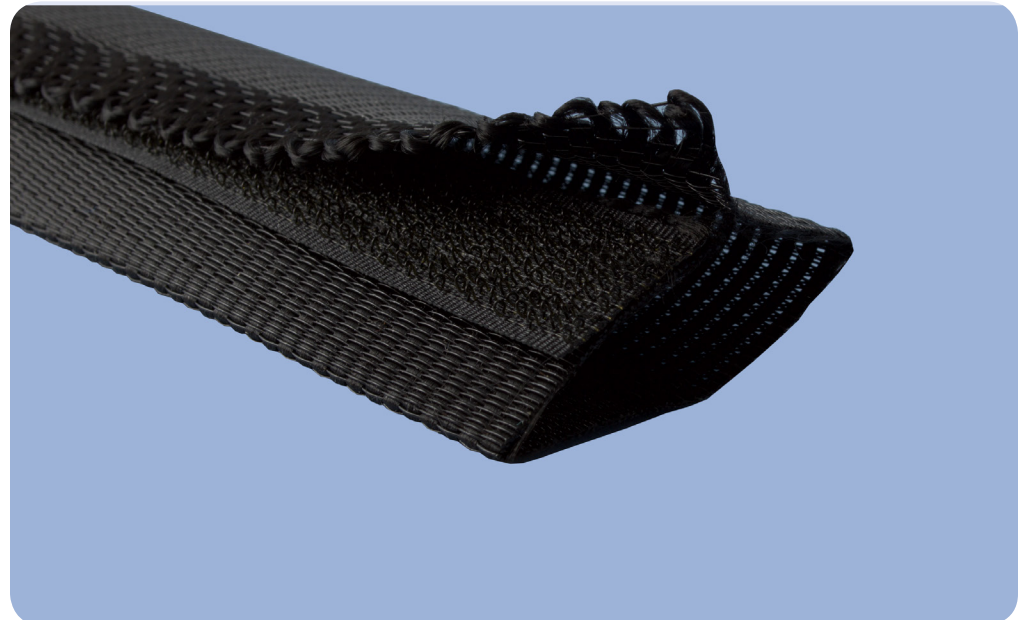

FlexWrap® 2300 is a lightweight sleeve with a unique hook and loop self-closing feature that eliminates spot taping and does not require an open end for installation. The sleeve and integral loop portion of the closure system are manufactured entirely of polyester (PET) materials. FlexWrap 2300 permits easy access for inspection, rework or replacement of components.

Used to bundle wire harnesses, FlexWrap 2300 provides cut-through and abrasion protection and is easily applied to areas restricted by breakouts and large end fittings. FlexWrap 2300's highly flexible and low profile construction allows engineers more design freedom compared to typical molded plastic channels.

BentleyHarris®
Protection Products

Performance Data – FlexWrap® 2300

Property	Test Method	Result
Temperature Rating	240 hours at 150°C (125°C rating)	Pass 125°C (+257°F)
Low Temperature Flexibility	BH100-016A	Pass -70°C (-94°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass
Melt Temperature	ASTM D3418	245°C to 265°C (+473°F to +509°F)

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Warp Yarn: Polyester (PET) monofilament
Fill Yarn: Polyester (PET) multifilament

Availability

FlexWrap 2300 is available in a range of sizes and cut to your specification. Color is black. Please contact your sales representative for availability.

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.



USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp