



ABRASION/MECHANICAL

LocatWrap® 2480

Product Highlights

- Operating temperature
-40°C to +150°C
(-40°F to +302°F)
- Self-closing tubular design
- Integrated closure and locating system
- Eliminates the need for additional taping
- Allows for easy break-outs
- Excellent abrasion resistance
- Flexible
- Easy and quick installation


Typical Applications

- Body wiring harnesses
- Instrument panel harnesses
- Engine compartment harnesses



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

LW2480_07202017

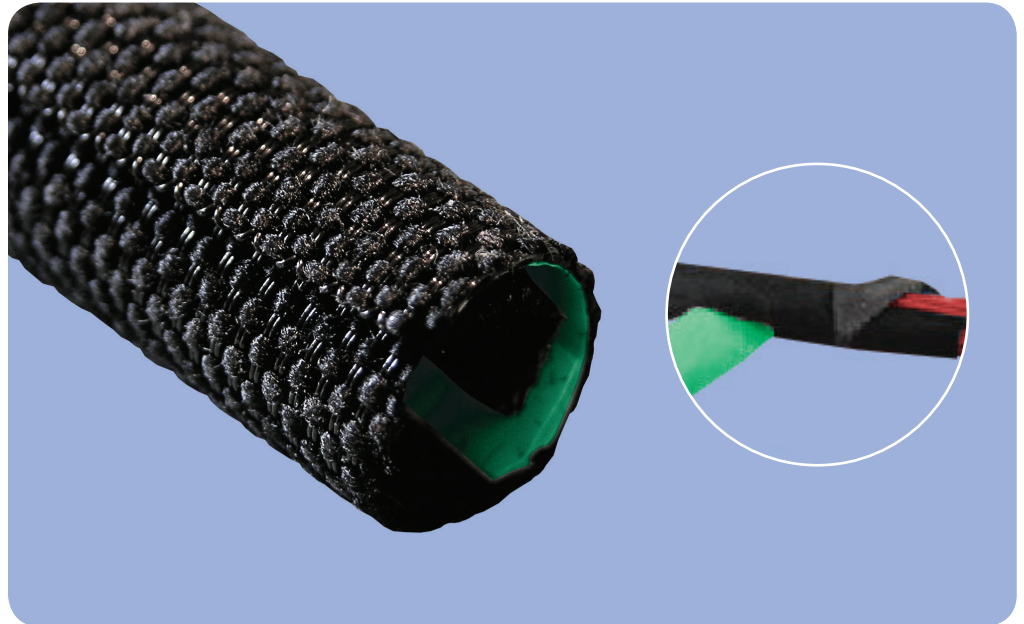

LocatWrap® 2480 is a self-closing oversleeve designed to provide mechanical protection. LocatWrap 2480 is made out of a woven substrate of monofilament and multifilament polyester yarns equipped with an adhesive tape. This unique design gives the adhesive tape the double advantage of holding the sleeve in place on the application and being a secure closing system.

LocatWrap 2480 is a system which offers a high level of component protection and eliminates the need of additional taping. It is both flexible and lightweight.

LocatWrap 2480 fits tightly on wire harnesses, saving space, without reducing the flexibility of the wire bundles it protects. It also maintains a circular profile when flexed. Its self-wrapping design allows for quick and easy bundling of wire and cable assemblies. It easily allows for breakouts and can be installed over completed assemblies.

BentleyHarris®
Protection Products

Performance Data – LocatWrap® 2480

Property	Test Method	Result
Temperature Rating	240 hours at +175°C (+150°C rating)	Pass +150°C (+302°F) Neither visible degradation nor loss of flexibility
Low Temperature Flexibility	BH100-016A	Pass -40°C (-40°F)
Flammability	FMVSS 302	Pass
Fluid Resistance	D47 1924	No visible degradation or alteration after being exposed to the following test cycles: <ul style="list-style-type: none"> • Immersion for 15s at 22°C followed by a drying period of 24hrs at 150°C: motor oil, protection oil, automatic transmission fluid, mineral hydraulic fluid, zinc chloride (drying at 23°C) • Immersion for 2hrs at 70°C (in vapor), followed by a drying period of 4hrs at 23°C: battery fluid • Immersion for 24hrs at 70°C: wind-screen washer • Immersion for 24hrs at 40°C followed by a drying period of 4hrs at 23°C: fuel C +15% methanol, unloaded petrol 98.
Gasoline Resistance	STE 9645871099	No visible degradation after gasoline spray on the product, which is placed in an oven for 24hrs at 40°C and repeated 10 times.

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Warp Yarn: Polyester (PET) multifilament
Fill Yarn: Polyester (PET) monofilament

Standard Sizes

Size	Recommended Application Range (mm)	
	Min Ø	Max Ø
7	5	7
9	8	9
12	10	12
16	14	16
18	16	18
22	20	22
25	23	25
31	29	31

Availability

LocatWrap® 2480 is available in a range of sizes cut to your specification. Standard color is black. Please contact your sales representative for availability.



USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.