



EMI

# TwistTube® 2472

## Product Highlights

- Operating temperature up to +150°C (+302°F)
- Provides electromagnetic shielding
- Self-wrapping design
- Integrated drain wire for proper grounding


## Typical Applications

- Instrument panel harnesses
- Engine compartment harnesses
- Battery cables
- Interior harnesses



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

TT2472\_07202017

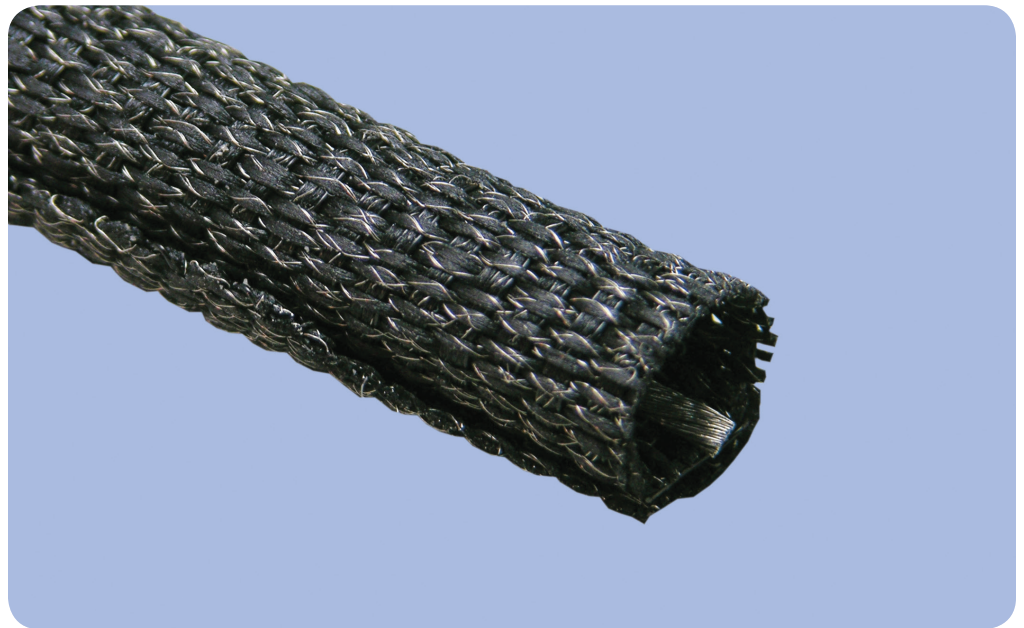

**TwistTube® 2472** is a self-wrapping sleeve designed to provide >30dB of electromagnetic (EM) screening attenuation. 316L fine stainless steel wire is combined with polyester yarn to create a wrappable product that offers flexibility and consistent shielding protection in corrosive environments. The product features an acrylic/silicone coating to prevent end fray and enable cold cutting for specific product lengths.

Unlike foils and films, TwistTube® 2472 is durable and tear resistant, enabling it to provide long term protection. The product is engineered to reduce installation time, accommodate breakouts and can be installed over completed assemblies. An optional 19 AWG, 316L stranded stainless steel wire is integrated into the sleeve for electrical grounding purposes.


**BentleyHarris®**  
Protection Products

# Performance Data – TwistTube® 2472

Property	Test Method	Result
Temperature Rating	240 hours at +175°C (+150°F) rating	Pass +150°C (+302°F)
Low Temperature Flexibility	BH100-016A	Pass -70°C (-94°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass
Salt Spray Endurance	ASTM G85	Pass - no corrosion
Shielding Effectiveness	IEC 62153-4-3	See graph below


All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Shielding Effectiveness of Slewing

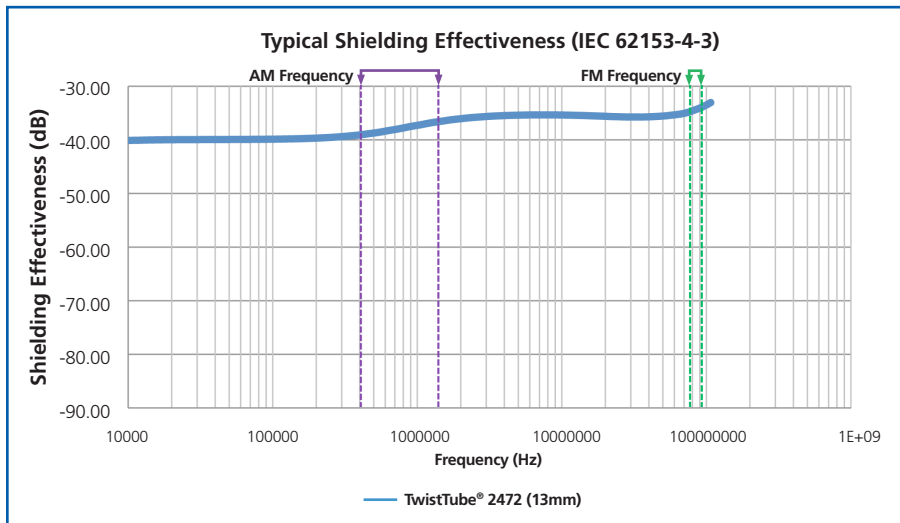

## Availability

TwistTube 2472 is available in a range of sizes and cut to your specification. Color is black. Please contact your sales representative for availability.

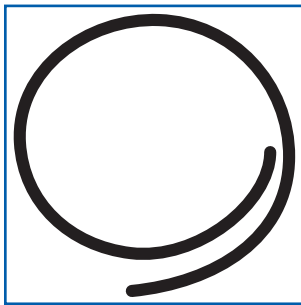

End view of TwistTube 2472 illustrating self-wrapping construction.

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products. The trademarks displayed are owned by Federal-Mogul Corporation, or its subsidiaries, in one or more countries.

**FEDERAL  
MOGUL**  
Systems Protection

**USA:** (1) 800 926 2472  
**Europe:** (33) 3 44 39 06 06  
**Japan:** (81) 45 479 0201  
**China:** (86) 21 6182 7688

[www.federalmogul.com/sp](http://www.federalmogul.com/sp)